
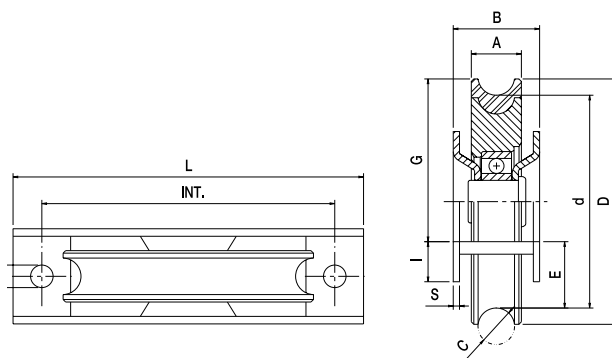


I Ruota rivestita in materiale poliuretanico a 1 cuscinetto - gola O con supporto

- UK Polyurethane coated wheel 1 bearing - O groove with support
D Polyurethan verkleidert. Rolle 1 - Lager - O Nut mit Stuetzplatten
F Roue revêtue polyuréthane 1 roulement - gorge O avec support
E Rueda con soporte recubierta poliuretano 1 cojinetes - guía O
RUS Колесо, покрытое полиуретановым материалом на 1 подшипнике - O-образный желоб с суппортом

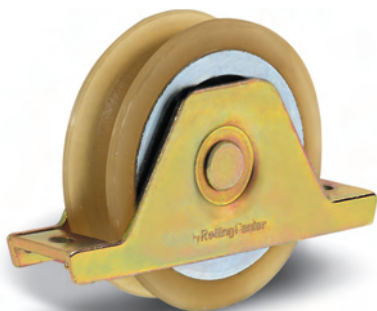


Compatibile con

NEWOMEGA NEWOMEGA2 FLOOR HEAVY IBBI SISTEMA

Articolo - Article		D	d	A	B	C	G	I	E	S	L	Portata Capacity		
Riferimento - Reference				mm		O	mm					 x1	N°	
926 PS0N	RN 90 26 OS	90	70	26	34	21	63	16	16	3	140	150 kg	12	9,7

I Ruote in C45 con supporto saldato regolabile in altezza - gola O

- UK Wheels with welded support, adjustable in height - O groove
D Laufrollen mit Hoehenvestellbaren Geschweiss. Stuetzplatten - O Nut
F Roues avec support soudé réglable en hauteur - gorge O
E Ruedas con soporte soldado regulable en altura - guía O para atornillar
RUS Ролик с кронштейном под сварку регулируемый паз O

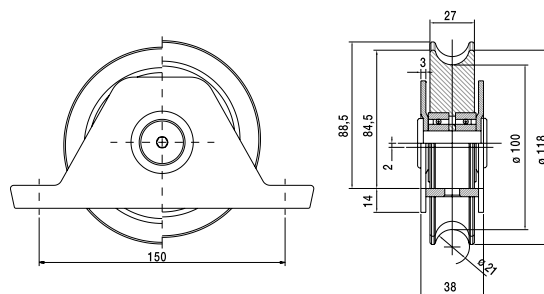


Compatibile con

NEWOMEGA NEWOMEGA2 FLOOR HEAVY IBBI SISTEMA

Articolo - Article		Portata Capacity		
Riferimento - Reference		 x1	N°	
1227 PSO R	RT 12 27 OR	350	6	13,8

I Carrucole in C45 senza cuscinetto per centine autocarri


- UK Pulleys with out bearing for truck's rib
D Laufrollen ohne Lager, runde Nut, fuer Lkw Plane
F Poulies sans roulement
E Poleas sin cojinete para lona de camion
RUS Шкив без подшипника



Articolo - Article		D	d	di	A	C		
Riferimento - Reference			Ø		mm	O	N°	
515 OF 10	RO 50 15 00	50	35	10,2	15	10	60	10,6
618 OF 10	RO 60 18 05	60	45	10,2	18	10	30	9,2
618 OF 12	RO 60 18 06	60	45	12,2	18	10	30	8,8

I Carrucole in C45 a 1 cuscinetto per centine autocarri


- UK Pulleys with one bearing for truck's rib
D Laufrollen mit einem Lager, runde Nut, fuer Lkw Plane
F Poulies avec 1 roulement
E Poleas con 1 cojinete para lona de camion
RUS Шкив с 1 подшипником



Articolo - Article		D	d	A	B	C	F		
Riferimento - Reference		Ø		mm		Ø	UNI	N°	
518 O	RT 50 18 01	50	40	18	24	10	M 10x45	30	7,1
618 O	RT 60 18 01	60	45	18	24	10	M 10x45	30	9,2
818 O	RT 80 18 01	80	65	18	24	10	M 12x50	20	11,7

I Ruota in nylon Ø 50 gola tonda d.12


- UK One bearing nylon wheel Ø 50 round groove
D 1 - Lager Nylon Rolle Ø 50 runde Nut
F Roue nylon Ø 50 à gorge ronde 1 roulement à billes
E Ruedas nylon Ø 50 1 cojinete - guía Ø
RUS Ролик нейлоновый Ø 50, с 1 подшипником паз Ø



Articolo - Article		D	d	di	A	C	Portata Capacity		
Riferimento - Reference		Ø			mm	Ø	kg x1	N°	
518 ON	RP 50 18 01	50	38	10	18	12	55	30	2

I Ruote in nylon Ø 60 - gola V


- UK Nylon wheels Ø 60 - V groove
D Nylon Rolle, Ø 60 mm - V Nut
F Roues en nylon, Ø 60 - gorge V
E Ruedas nylon Ø 60 - guía V
RUS Ролик нейлоновый Ø 60 паз V



Articolo - Article		D	d	A	B	C	F	Portata Capacity		
Riferimento - Reference		Ø		mm		V	UNI	kg x1	N°	
617 VN	RP 60 17 V2	60	50,5	17	20	96°	M 10x45	55	30	4,2

I Carrucole in nylon per fune

- UK Nylon pulleys for ropes
- D Nylon Rolle fuer Seile
- F Poulie pour cable en nylon
- E Poleas nylon para cuerda
- RUS Шкив нейлоновый для троса



Articolo - Article		D	d	di	A	B	C		
Riferimento - Reference			Ø		mm		Ø	N°	
NEW 613 NF 12	RP 60 13 00	60	48	12	13,5	15	6	70	4,3
613 NF 15	RP 60 13 01	60	48	15	13,5	15	6	70	4,3
813 NF 12	RP 80 13 00	80	66	12	13,5	15	6	70	5,5
813 NF 15	RP 80 13 01	80	66	15	13,5	15	6	70	5,5
913 NF 12	RP 90 13 00	90	76	12	13,5	15	6	70	6
913 NF 15	RP 90 13 01	90	76	15	13,5	15	6	70	6
1013 NF 12	RP 10 13 00	100	86	12	13,5	15	6	60	6,2
1013 NF 15	RP 10 13 01	100	86	15	13,5	15	6	60	6,2
1217 NF 12	RP 12 17 00	120	106	12	17	20	8	50	7
1217 NF 15	RP 12 17 01	120	106	15	17	20	8	50	7


I Carrucole in acciaio per fune

- UK Steel pulleys for ropes
- D Stahlrollen fuer Seile
- F Poulie pour cable en acier
- E Poleas en acero para cuerda
- RUS Шкив стальной для троса



I Per la durata delle funi è importante l'arrotondamento all'entrata della gola


- UK For longer rope life the rounding at the top of both sides is important
- D Für die Lebensdauer der Laufrolle ist die Rundung am einlauf der Laufrolle maßgebend
- F Pour donner plus de longévité aux cables nous arrondissons l'entrée de la gorge
- E Para la mayor duración de los cables redondeamos a la entrada de la garganta
- RUS Для увеличения срока службы роликов необходимо закругление на входе в направляющую канавку

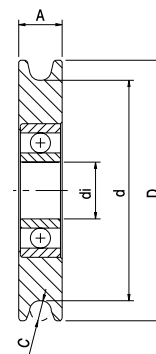

Articolo - Article		D	d	di	A	C		
Riferimento - Reference			Ø		mm		Ø	N°
613	RT 60 13 00	60	46	17	13	6	50	8,3
813	RT 80 13 00	80	66	17	13	6	40	14,2
913	RT 90 13 00	90	76	17	13	6	30	14,4
1013	RT 10 13 00	100	86	17	13	6	20	13
1213	RT 12 13 00	120	106	17	13	6	20	18,9

I Boccole per carrucole in acciaio per fune

- UK Bushings for steel pulleys
- D Lagerringe fuer Seilrollen
- F Axe pour poulie en acier
- E Casquillo de polea en acero
- RUS Ось стального шкива для троса



Articolo - Article		Abbinabile Combining	d	di	B
Riferimento - Reference		Ø	Ø	mm	
BT 15	TT 15 01 OX	60/80/90/100/120	17	15	15
BT 17	TT 12 02 OX	60/80/90/100/120	17	12	17
BT 22	TT 12 05 OX	60/80/90/100/120	17	12	22