









- I** Carrello "Basic" per cancelli autoportanti
UK "Basic" carriage for cantilever gates
D "Basic" Rollenapparat für freitragende Schiebetore
F Chariot "Basic" pour portails autoportants
E Carro "Basic" para puertas autoportantes
RUS Тележка для консольных сдвижных ворот базовая


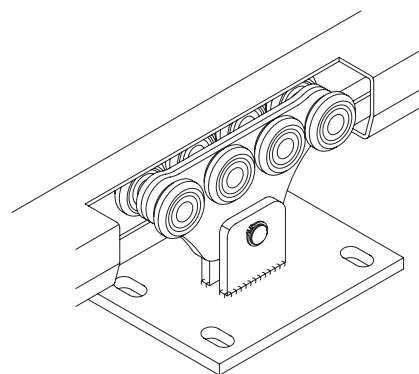


Articolo - Article	L1	Peso max cancello Gate max weight	Abbinabile Combining	
Riferimento - Reference	Max ML			
CA 4 RPSI LI 00 50 80	3 - 6	450 kg	GIPI 4 RLI	N° 2 9,58

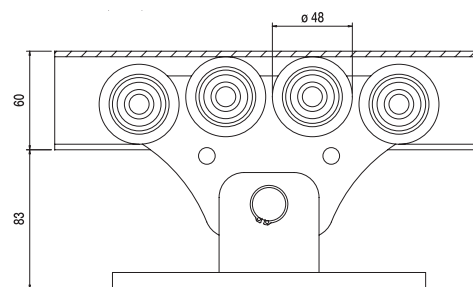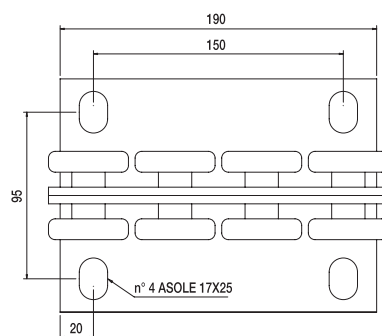

Peso max cancello Gate max weight	L1 (mt)	L2 (mt)	L4 (mt)	L5 (mt)	LT (mt)	H (mt)	E (mt)	A (mt)	B (mt)	C (mt)	Portata max carrello Carriage strength
450 kg	3,0	0,9	1,66	0,20	4,7	1,7	0,19	1,8	0,6	0,5	900 kg
450 kg	4,0	1,2	1,96	0,20	6,0	1,7	0,19	2	0,6	0,5	900 kg
450 kg	5,0	1,5	2,26	0,20	7,3	1,7	0,19	2,3	0,8	0,5	900 kg
450 kg	6,0	1,8	2,56	0,20	8,6	1,7	0,19	2,6	0,8	0,5	900 kg

Fondazione Armatura	
4 Ø 12	4 Ø 12
4 Ø 12	4 Ø 12
4 Ø 12	4 Ø 12
4 Ø 12	4 Ø 12

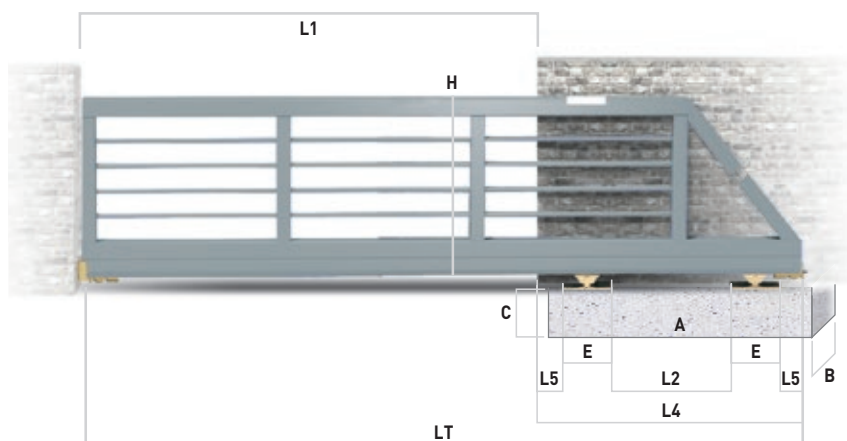

$$LT = L1 + L4$$

$$L2 = 30\% \text{ di } L1$$

$$L4 = L2 + (E + L5) \times 2$$

Accessori Abbinabili / Combining accessories

CA 4 RPSI

x2



41 BI

x2



50 BI

x2



GIPI 4 RLI

*




* Lunghezza guida variabile
Variable track length

4 RM I - 4 RMP I




x2



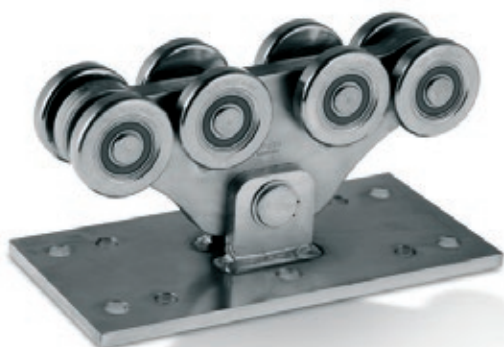


UK
D
F
E
RUS

средняя тележка для раздвижных ворот

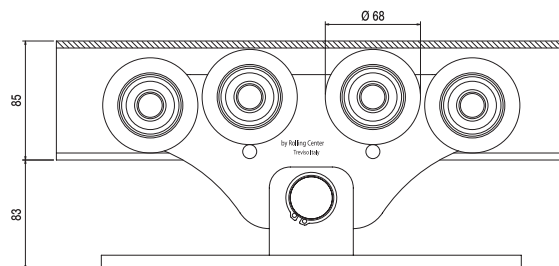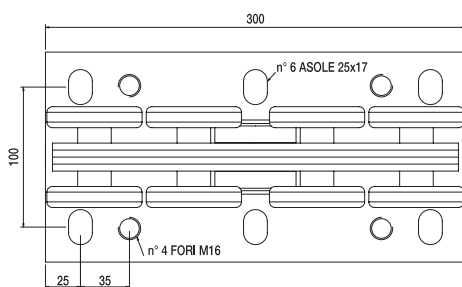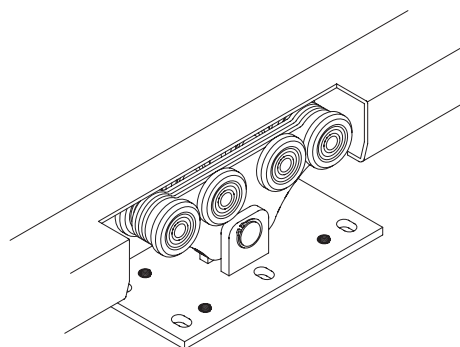

Technical drawing of a reinforced concrete slab cross-section. The drawing shows a rectangular slab with a width labeled B and a height labeled h . The top reinforcement is labeled "Armatura sup." and the bottom reinforcement is labeled "Armatura inf.". The diameter of the reinforcement bars is indicated as $\varnothing 16$.

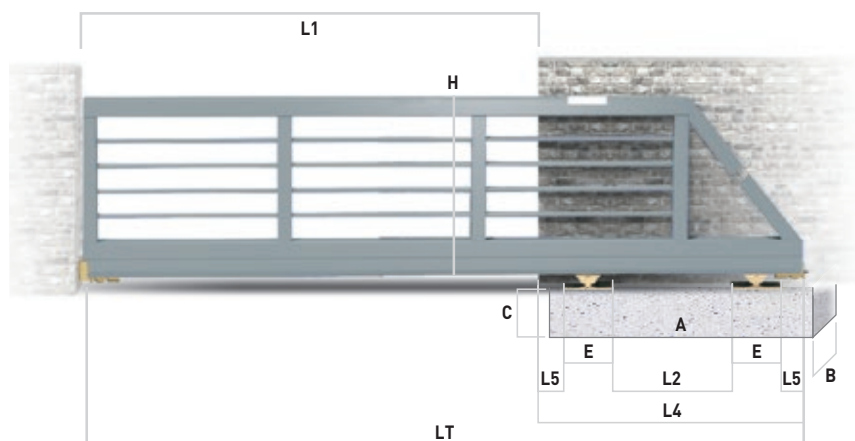

$$L4 = L2 + (E + L5) \times 2$$

CA4RS I



x2

50 P I



x2

4RM I



x2

41 P I




x2

GIPI 4 RGI




* Lunghezza guida variabile
Variable track length

- I** Incontro
UK Meeting point
D Führungsendstück
F Butée
E Punto de recepción
RUS Ловушка

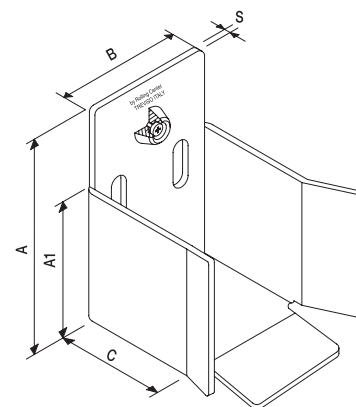


Articolo - Article		A	A1	B	C	S	Abbinabile Combining		
Riferimento - Reference		mm						N°	
50 B I	FI 15 80 00	135	85	87	90	4	GIPI 4 RPI	2	2,4
50 P I	FI 16 10 00	161	96	112	82	4	GIPI 4 RGI	5	8,4

- I** Ruota di sostegno
UK Support wheel
D Stützrad
F Roue de support
E Rueda de soporte con placa para atornillar
RUS Ролик концевой

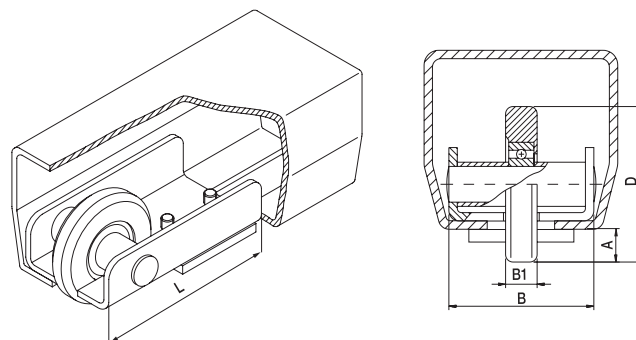

Articolo - Article		B	B1	L	A	D	Abbinabile Combining		
Riferimento - Reference		mm						N°	
41 B I	LI 00 50 10	50	15	132	13	68	GIPI 4 RPI	10	12
41 P I	LI 00 74 10	69	15	132	14,5	74	GIPI 4 RGI	10	12

- I** Guida per cancelli scorrevoli autoportanti
UK Guide for sliding cantilever gates
D Profilschiene für freitragende Schiebetore
F Rail pour portail suspendu
E Correderas autoportantes
RUS Балка несущая для сдвижных ворот



Tipo Type	Articolo - Article		Abbinabile Combining	L	H	A	B	C	S	Finitura Description	Fasci Sheafs
	Riferimento - Reference			mm							ML
	GIPI 4 RLI 3	BI 69 59 03	CA 4 RPSI	69	59	22	52,5	25	3	Inox da ML 3	96 458
	GIPI 4 RLI 6	BI 69 59 00	CA 4 RPSI	69	59	22	52,5	25	3	Inox da ML 6	192 916
	GIPI 4 RGI 3	BI 94 87 03	CA 4 RSI	94	85	33	73	30	5	Inox da ML 3	60 714
	GIPI 4 RGI 6	BI 94 87 06	CA 4 RSI	94	85	33	73	30	5	Inox da ML 6	120 1428